



1.78 (070) ~ 5.09 (200)	+0.03 -0.10
0 ~ 1.77 (069)	+0.03 -0.05
DIMENSION A & B (MILS)	TOLERANCE (MM)

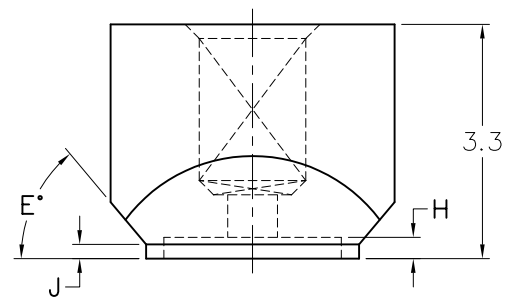

13-113D-07	3.00	1.00	2.50	0.50	50°	0.6	0.3	0.2
13-113D-06	2.81	1.61	2.21	0.80	50°	0.7	0.3	0.2
13-113D-05	2.23	2.23	1.63	1.63	50°	0.7	0.3	0.2
13-113D-04	1.60	1.44	1.2	1.0	50°	0.6	0.3	0.2
13-113D-03	4.0	1.20	2.50	0.80	50°	0.7	0.3	0.2
13-113D-02	3.00	1.20	2.50	0.80	50°	0.7	0.3	0.2
13-113D-01	4.0	1.40	3.50	1.00	50°	0.7	0.3	0.2
PART NO.	A	B	C	D	E°	øF	H	MAX. J

**SALES COPY
UNCONTROLLED DOCUMENT**

Copying of this document and giving it to others and the use of communication of the contents thereof are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

TOLERANCE UNLESS SPECIFIED X.X ±0.10 GENERAL TOL. ±0.2 X.XX ±0.05 ANGLE ±0.5° SURFACE FINISH 1.6/ REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS IN MM. 13-99-021 R03	MATERIAL: FLUORO	PROCESS: -	TITLE: RUBBER TIP (MODIFICATION FRAME TIP) (12U1/3 HOLDER)	REV. 5		
	 MICRO-MECHANICS PTE LTD mmsingapore@micro-mechanics.com TEL: 67468800 FAX: 67467700	DATE: 17-11-08	DRAFTSMAN: DESMOND	SCALE: 10:1 DRAWING NO: 13-113D-XX	SHEET 1	
		CHECKER: HS TOK				1